



S1

818 KGF

DIMENSION		SPECIFICATIONS		CLAMPING RATE	
LENGTH	276 mm	STRENGTH	818 kgf	STEEL	2.4 - 4.8
HEIGHT	270 mm	AIR PRESSURE	5-7 bar	ALUMINIUM	2.4 - 4.8
WEIGHT	1.10 kg	STROKE	20 mm	STAINLESS STEEL	2.4 - 4.8



S2

918 KGF

DIMENSION		SPECIFICATIONS		CLAMPING RATE	
LENGTH	276 mm	STRENGTH	918 kgf	STEEL	2.4 - 5.0
HEIGHT	312 mm	AIR PRESSURE	5-7 bar	ALUMINIUM	2.4 - 5.0
WEIGHT	1.50 kg	STROKE	20 mm	STAINLESS STEEL	2.4 - 4.0



S3

1.497 KGF


DIMENSION		SPECIFICATIONS		CLAMPING RATE	
LENGTH	276 mm	STRENGTH	1.497 kgf	STEEL	3.0 - 6.4
HEIGHT	312 mm	AIR PRESSURE	5-7 bar	ALUMINIUM	3.0 - 6.4
WEIGHT	1.70 kg	STROKE	26 mm	STAINLESS STEEL	3.0 - 6.4



S4

1.904 KGF

DIMENSION		SPECIFICATIONS		CLAMPING RATE	
LENGTH	276 mm	STRENGTH	1.904 kgf	STEEL	4.8 - 6.4
HEIGHT	312 mm	AIR PRESSURE	6-7 bar	ALUMINIUM	4.8 - 6.4
WEIGHT	1.86 kg	STROKE	20 mm	STAINLESS STEEL	4.8 - 6.4

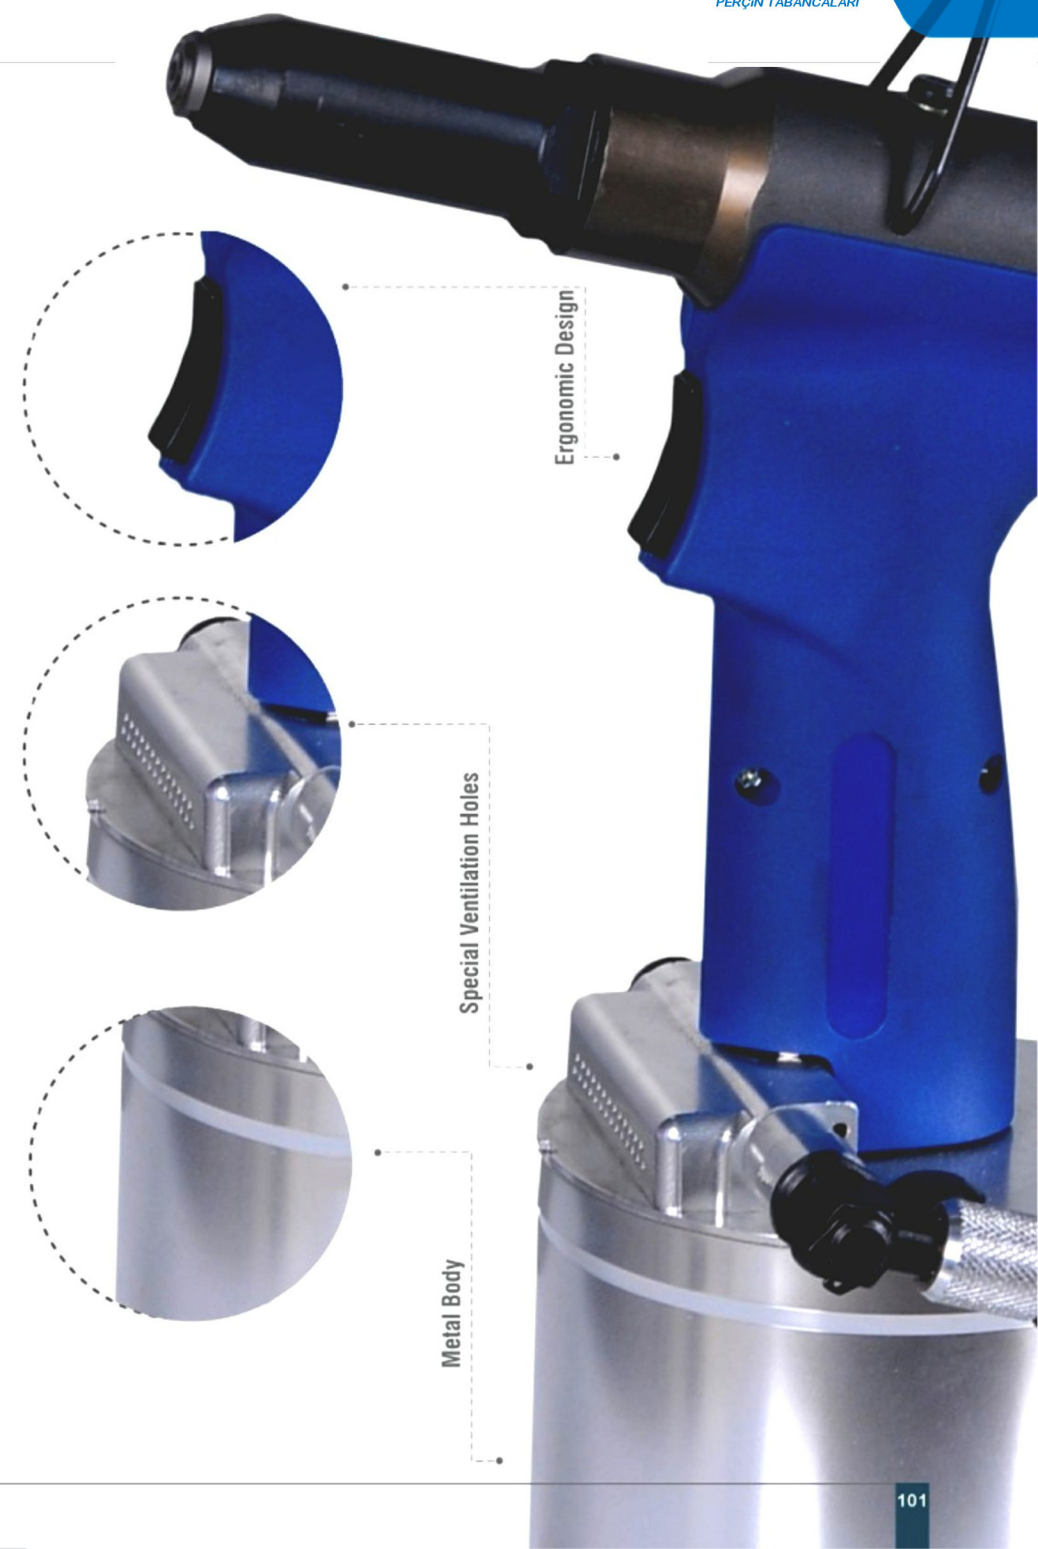

Ergonomic Design

Special Ventilation Holes

Metal Body